Topcat

All-in-one instructional audio system

Ceiling-mounted, wide-range audio system wirelessly delivers both voice and multimedia.

All-in-one design combined with wireless audio integration makes installation simple and cost effective for both new construction and existing classrooms.

Overcome the physical barriers to listening:

All classrooms have these barriers, regardless of acoustics

CLASSROOM NOISE

DISTANCE

VOCAL STRAIN

HEARING LOSS

Classroom audio creates better access to learning:

When students hear every word, valuable teaching time is more productive for all

43%
Less off-task behavior [1]

72%
Fewer teacher redirections

13%
Less teacher absenteeism

1 Clackamas County, OR, 2002

Combined with Clearmike, Topcat delivers the teacher's voice throughout the classroom.

- Wireless multimedia integration
- Seamless design, in-ceiling installation
- Add a second microphone for student sharing

WHOLE-CLASS SOLUTIONS

CEILING-MOUNTED

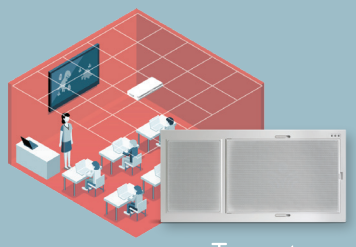

Topcat

INSTALLED AUDIO SYSTEMS

T25

PLUG & PLAY, PORTABLE

Redcat®

Topcat

Ceiling-Mounted Instructional Audio System

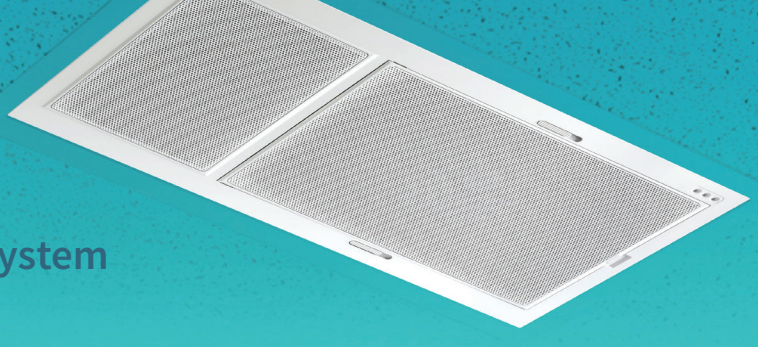

LAPTOPS

INTERACTIVE DISPLAYS

A/V CONTROL SYSTEMS

ASSISTIVE LISTENING

DISTANCE LEARNING

THE ALL-IN-ONE AUDIO CLASSROOM

Simple installation with Media Connector for wireless audio integration.

optional Media Connector*

SEAMLESS CEILING INSTALLATION

Flush-mounted design visually blends into acoustic ceilings.

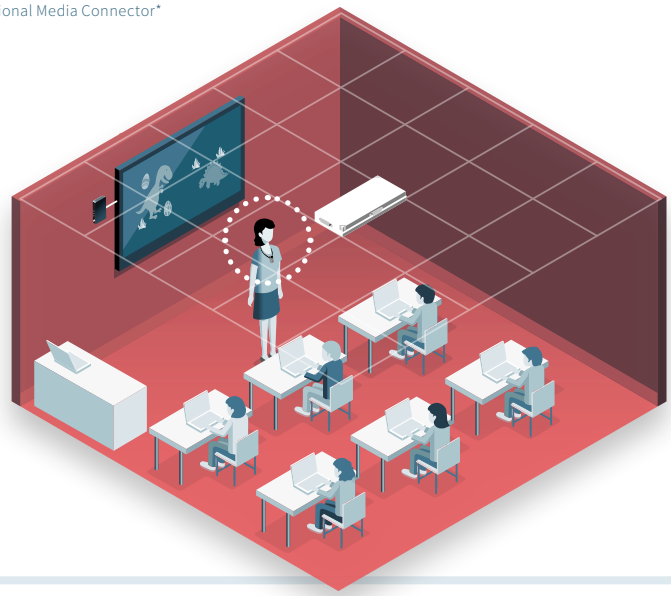

LIFE SAFETY INTEGRATIONS

Integrations with safety system partners add critical security functions.

ALERT NOTIFICATION
Activate alert with teacher mic

PAGING PRIORITY
Mutes instructional audio system

FIRE ALARM MUTE
Mutes instructional audio system

Wireless Communication	Access Technology (1.9 GHz)
Frequency Response	20 Hz - 20 kHz Power Amp, 150 Hz - 6.5 kHz Wireless
Power Supply Options	AC Mains: 100-240V ~ 50/60Hz 1.5A
Power Output	20W RMS
Tone Control	Bass/Treble Control
Audio Inputs	Three (3) 3.5mm inputs, one S/PDIF coaxial digital input
Audio Outputs	One (1) 3.5mm output
Maximum Input/Output Level	1.4VRMS / 1.4VRMS
Total Harmonic Distortion	<1%
Analog Control Signals	Inputs: PageFirst (25/70V page mute), Relay Input
	Output: Contact closure (initiated from microphone)
Dimensions (W x H x D)	23.75" x 11.73" x 4.19" (603mm x 298mm x 106mm)
Weight	21.2 lbs (9.2 kg)
Mounting	In-ceiling installation or wall-mount with bracket

POPULAR OPTIONS

*Media Connector
MULTIMEDIA INTEGRATION

Wallplate
AUDIO INPUT/OUTPUT

Sharemike
HANDHELD
STUDENT MIC

Lightspeed